


FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	1.7m ³ /h
Max head/Prevalenza massima:	10 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 2.8 Kg. PVDF 3.8 Kg.

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

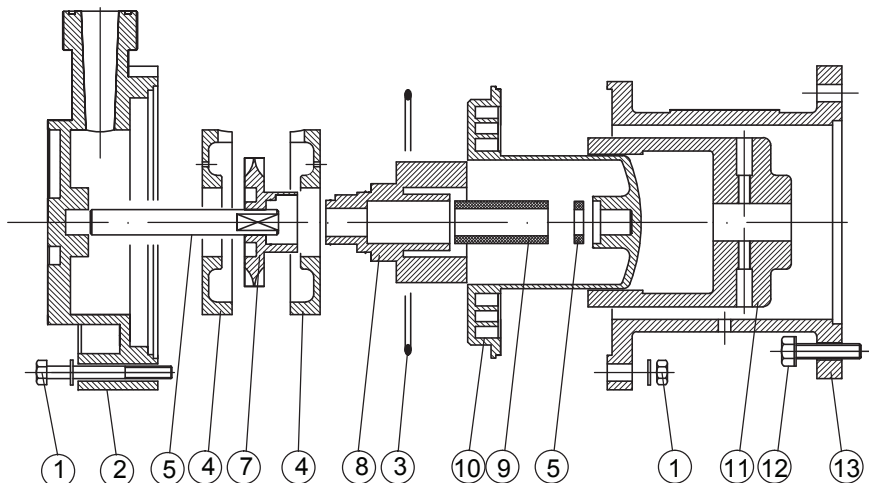


POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	ALSI304	PP-PVDF	EPDM VITON	PP-PVDF	AL203	PVDF	PP-PVDF NdFeb	PTFEC	PP-PVDF	C40 NdFeb	ALSI304	PP

CURVES/CURVE 50HZ-2900 RPM

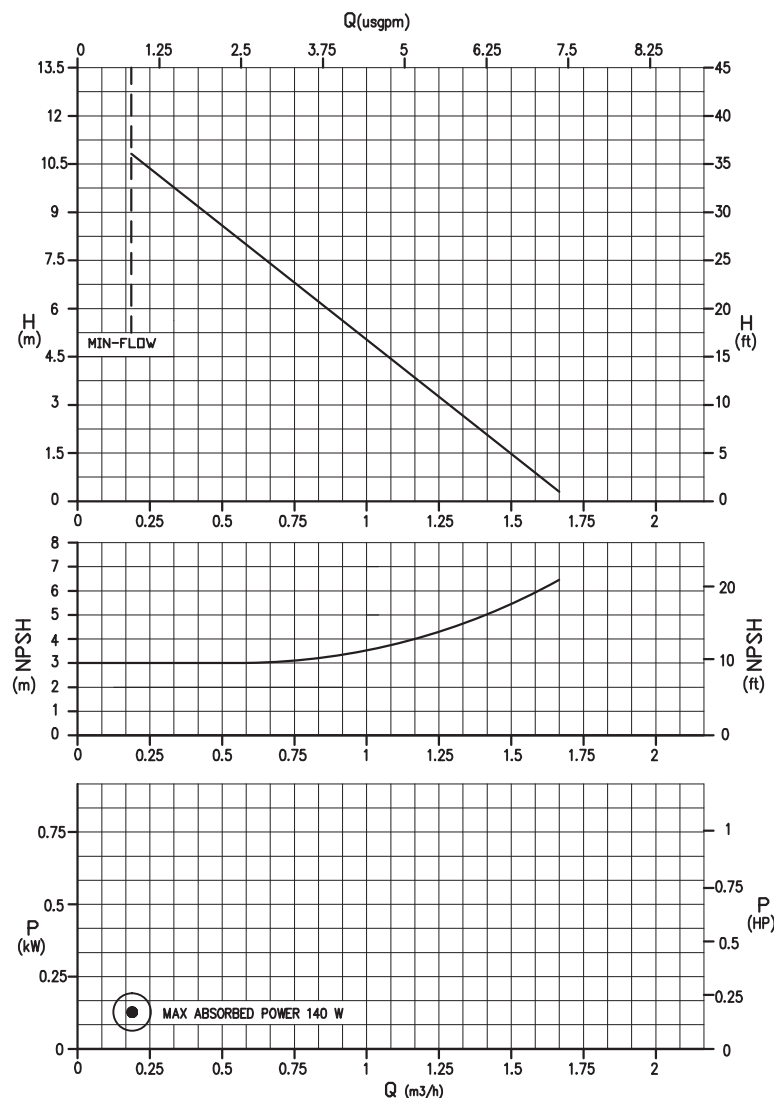

DIMENSIONS/DIMENSIONI D'INGOMBRO

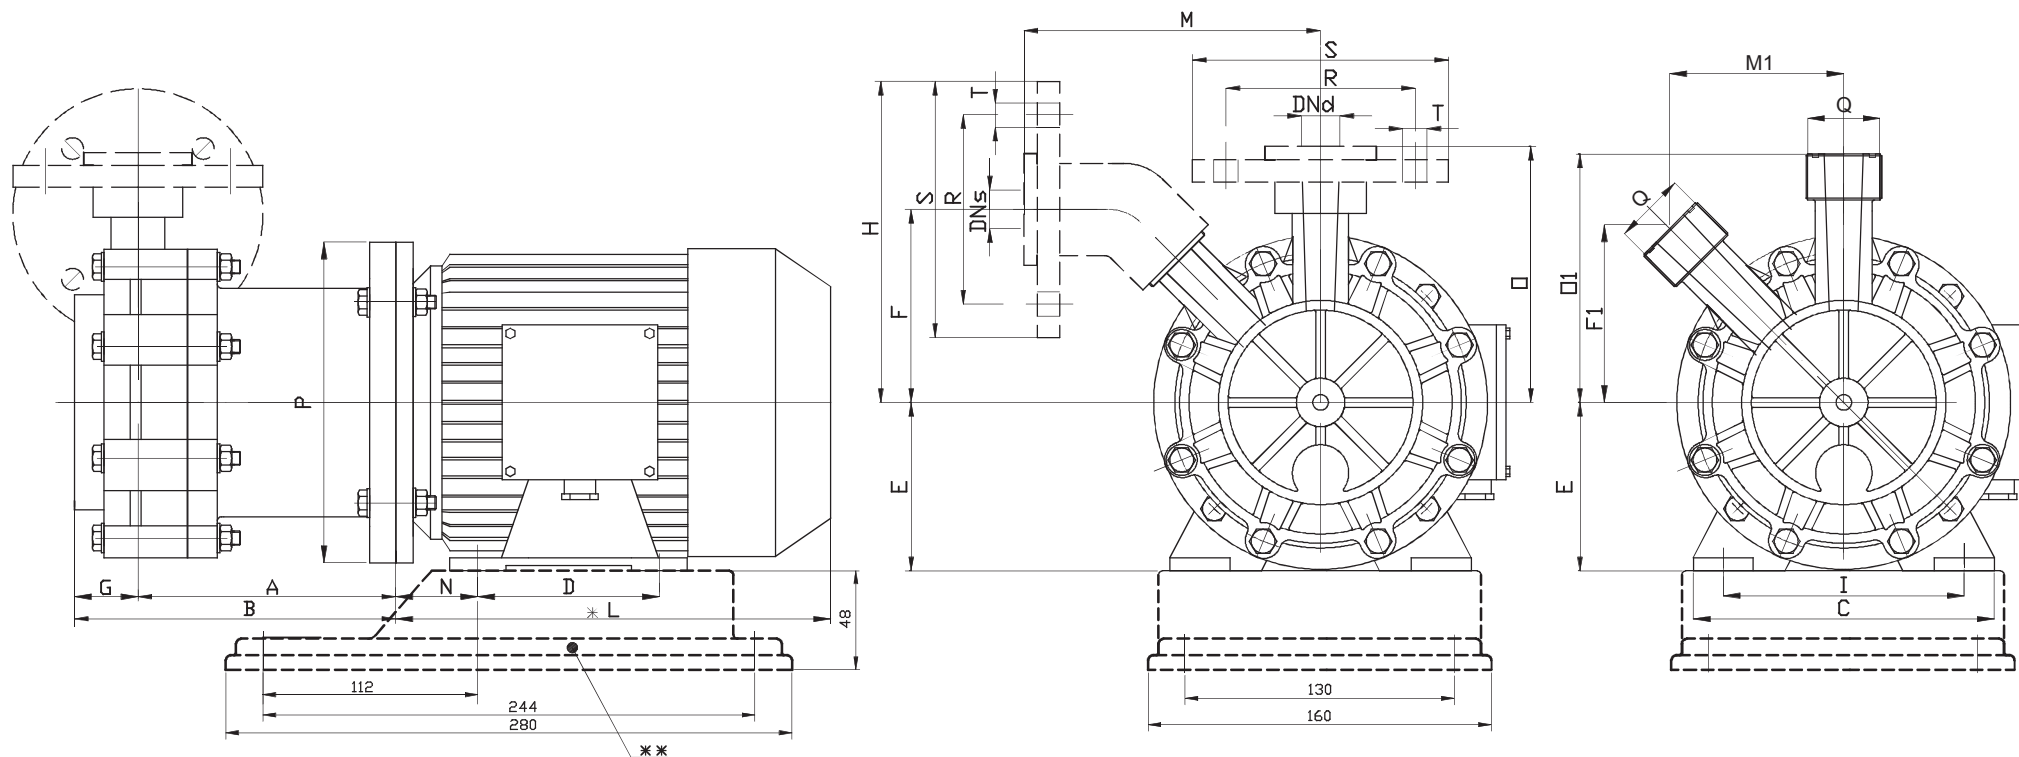

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -																		FLANGES DIN PN 10-DIMENSIONS-mm				
			A	B	C	D	E	F	F1	G	H	I	*L	M	M1	N	O	O1	P	Q	R	S	T	DNs	DNd
HTT 2000	G 71 2A	0.37	118	146	142	90	71	87.5	78	28	145	112	192	135	78	45	115	110	160	1" MALE	85	115	14	25	25


* Different according to the manufacturer / Diverso a seconda del fornitore

** OPTIONAL: Baseplate/Piede d'appoggio - Flanges/Flange

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	3 m ³ /h
Max head/Prevalenza massima:	21 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 2.8 Kg. PVDF 3.8 Kg.

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

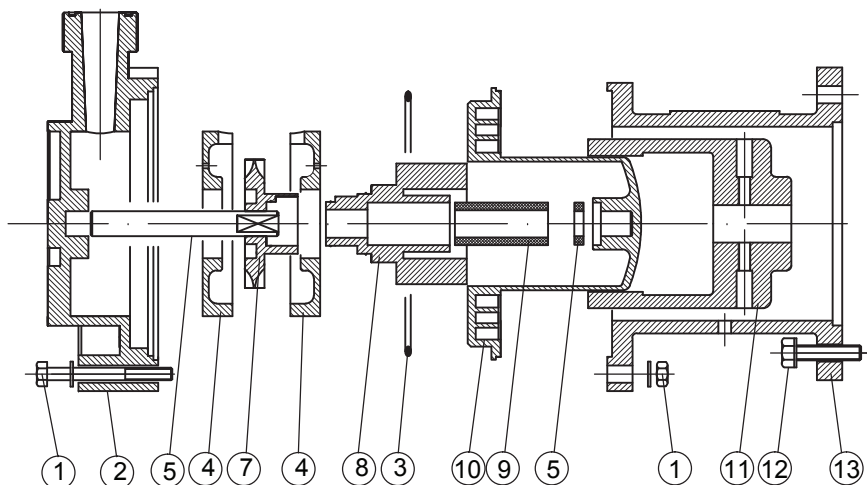

POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AlSi304	PP-PVDF	EPDM VITON	PP-PVDF	Al203	PVDF	PP-PVDF NdFeb	PTFEC	PP-PVDF	C40 NdFeb	AlSi304	PP


CURVES/CURVE 50HZ-2900 RPM

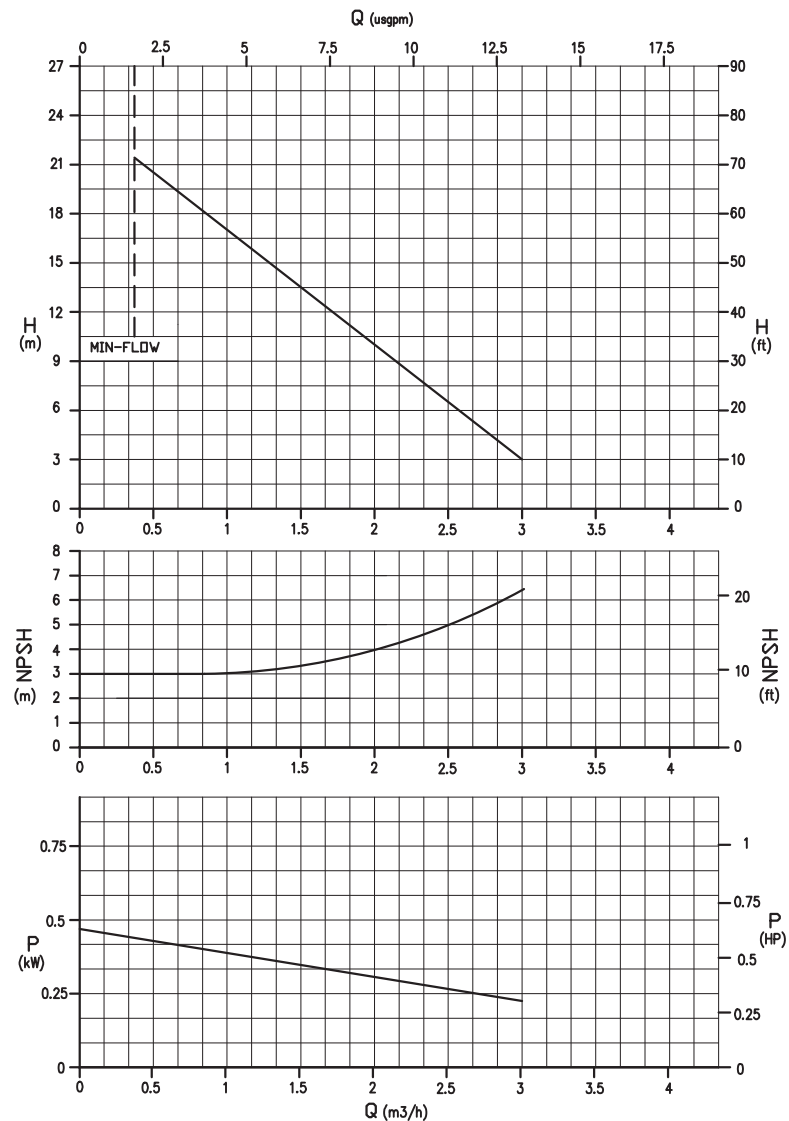

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	5 m ³ /h
Max head/Prevalenza massima:	30 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 8 Kg. PVDF 10 Kg.

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

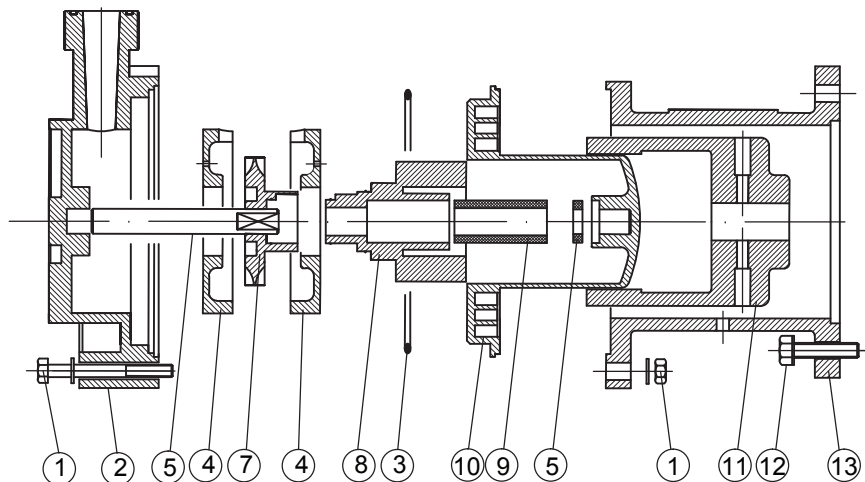


POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AlSi304	PP-PVDF	EPDM VITON	PP-PVDF	Al203	PVDF	PP-PVDF NdFeb	PTFEC	PP-PVDF	C40 NdFeb	AlSi304	PP

CURVES/CURVE 50HZ-2900 RPM

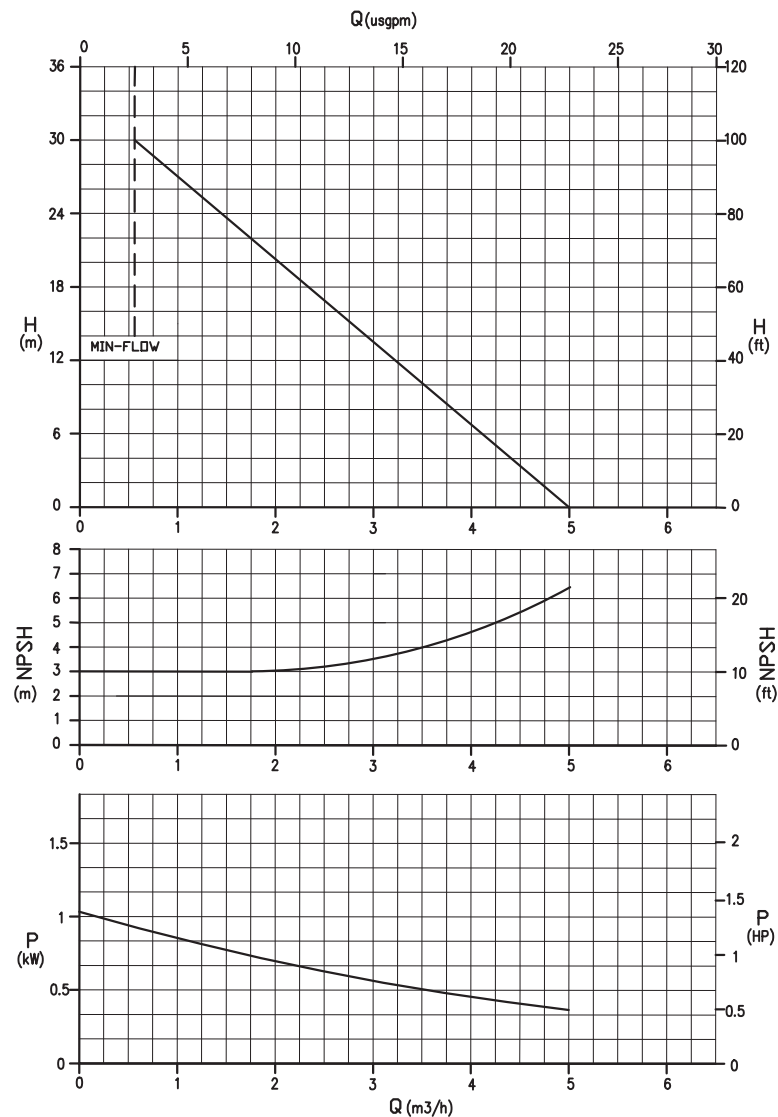

DIMENSIONS/DIMENSIONI D'INGOMBRO

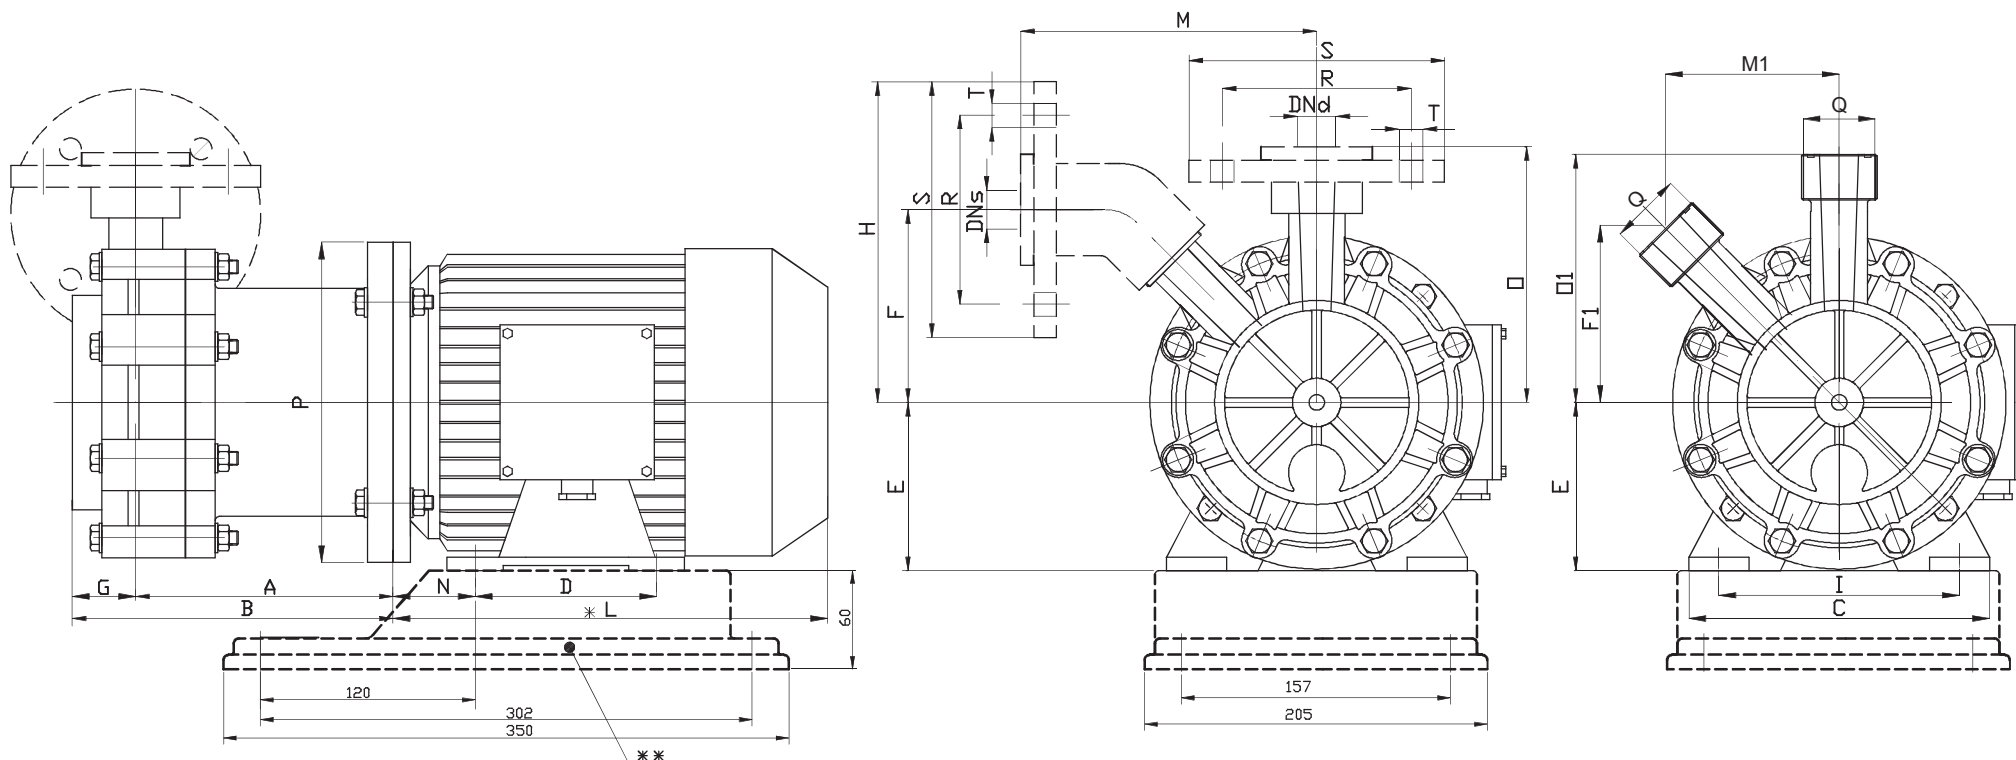


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -																		FLANGES DIN PN 10-DIMENSIONS-mm				
			A	B	C	D	E	F	F1	G	H	I	*L	M	M1	N	O	O1	P	Q	R	S	T	DNs	DNd
HTT 5000	G 80 A	0.75	187	221	160	100	80	110	95	34	186	125	215	189	95	50	148	135	200	1 1/2" G MALE	110	153	18	40	40
	G 80 B	1.1											232												

* Different according to the manufacturer / Diverso a seconda del fornitore
** OPTIONAL: Baseplate/Piede d'appoggio - Flanges/Flange

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	7m ³ /h
Max head/Prevalenza massima:	36 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 8 Kg. PVDF 10 Kg.

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

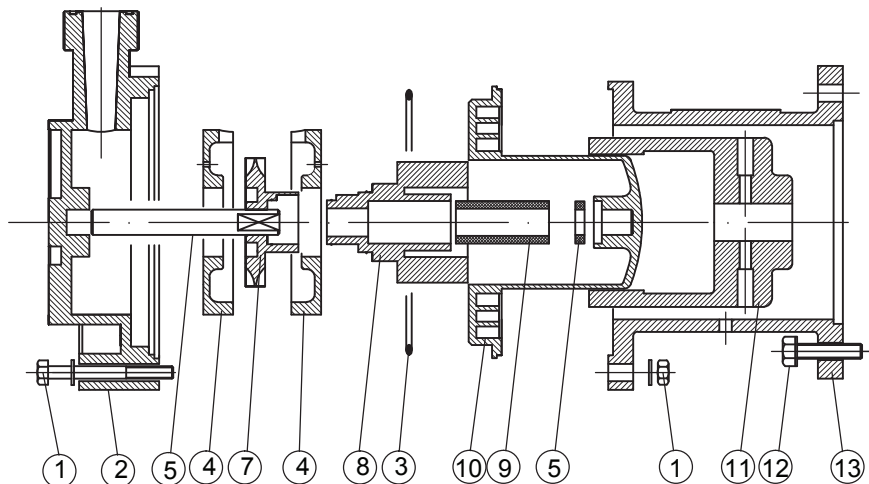


POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESC.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	ALSI304	PP-PVDF	EPDM VITON	PP-PVDF	Al203	PVDF	PP-PVDF NdFeb	PTFEC	PP-PVDF	C40 NdFeb	ALSI304	PP

CURVES/CURVE 50HZ-2900 RPM

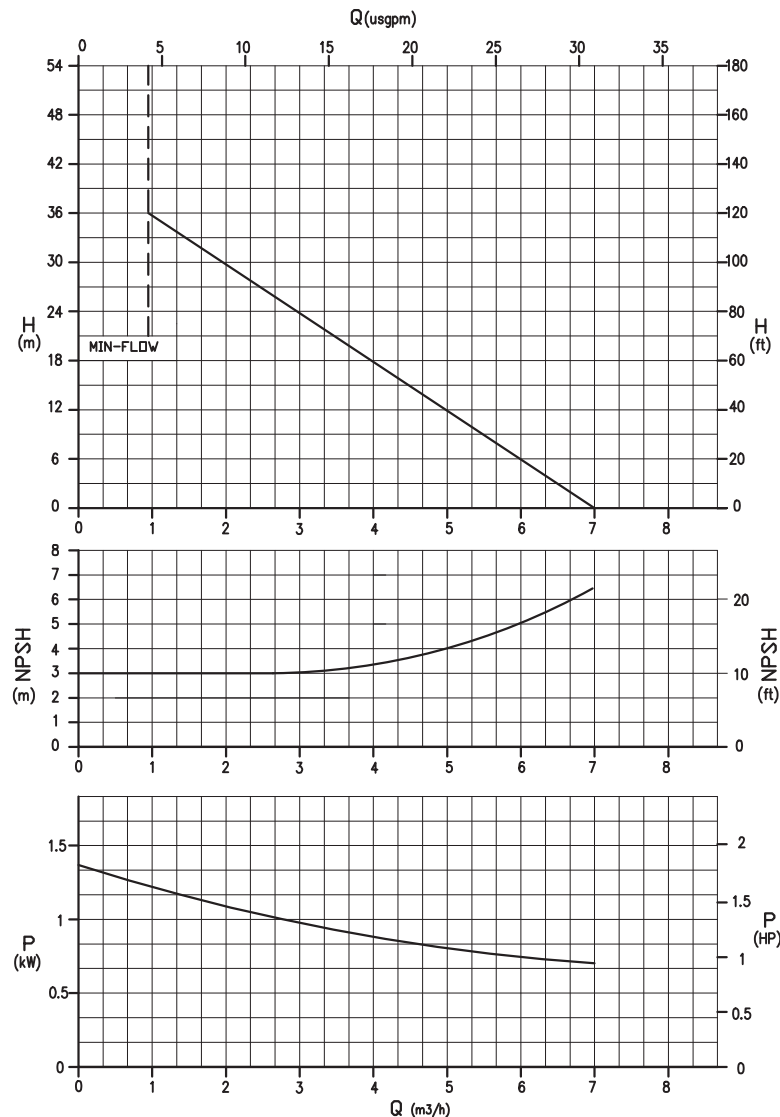

DIMENSIONS/DIMENSIONI D'INGOMBRO

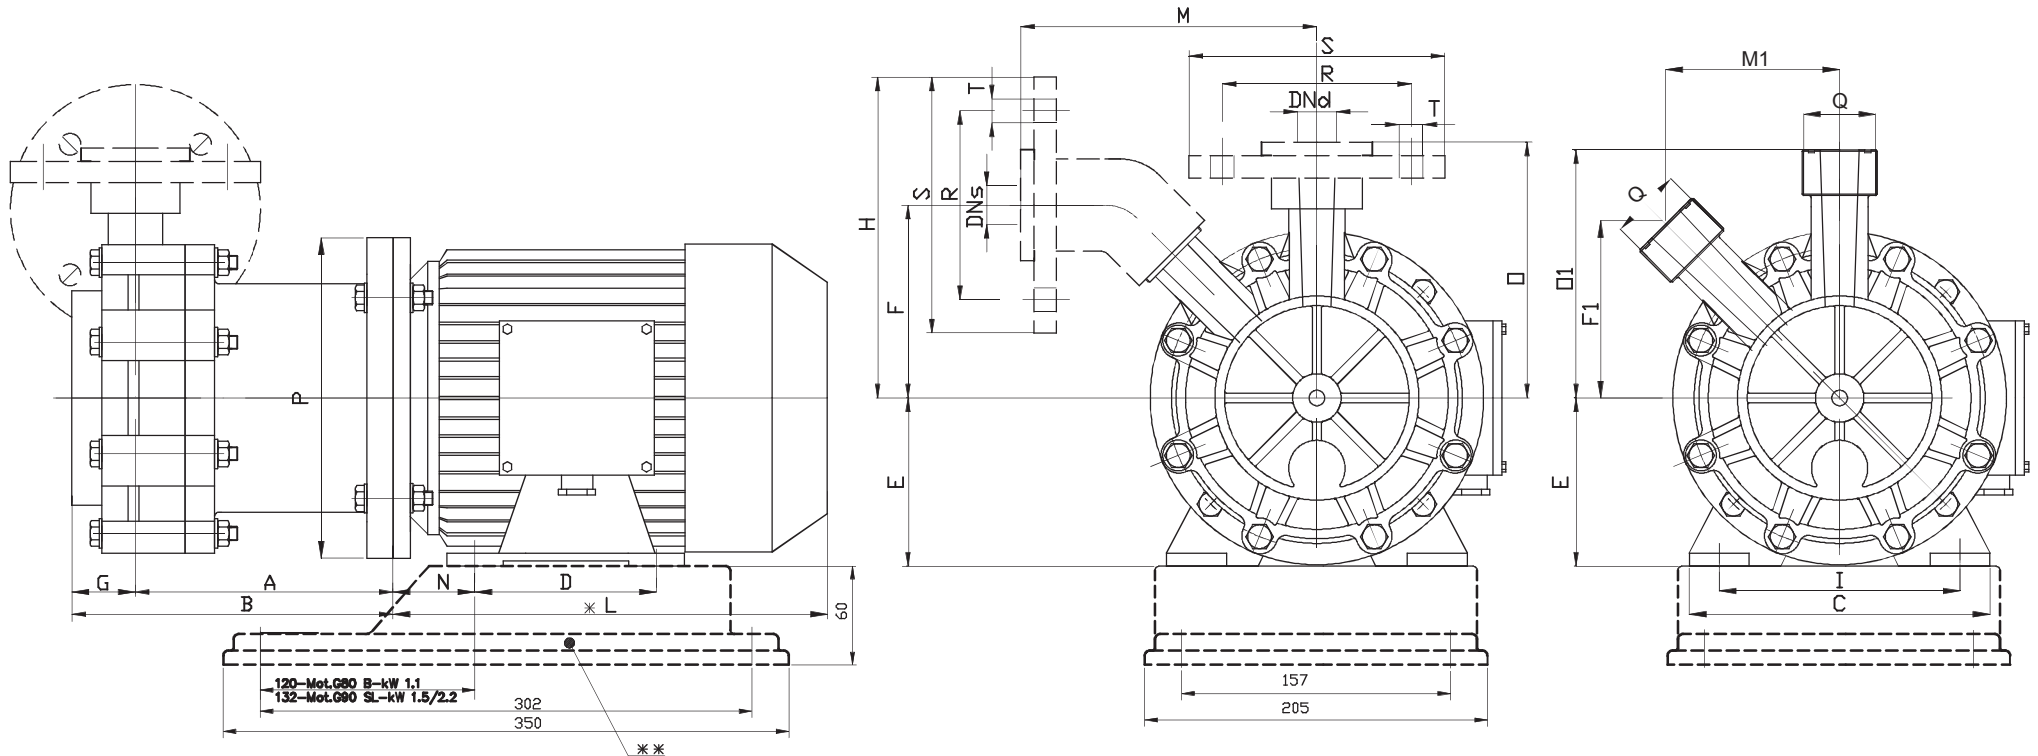


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -																		FLANGES ANSI/ASME B 16.5 #150 (PN10)				
			A	B	C	D	E	F	F1	G	H	I	*L	M	M1	N	O	O1	P	Q	R	S	T	DNs	DNd
HTT 7000	G 80 B	1.1	187	221	160	100	80	110	95	34	187	125	232	189	95	50	148	135	200	1" 1/2" G MALE	110	153	18	40	40
	G 90 S	1.5			170		90					140	255			56									
	G 90 L	2.2			170	125	90					140	280			56									

* Different according to the manufacturer / Diverso a seconda del fornitore
 ** OPTIONAL: Baseplate/Piede d'appoggio - Flanges/Flange

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	8 m ³ /h
Max head/Prevalenza massima:	36 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 8 Kg. PVDF 10 Kg.

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

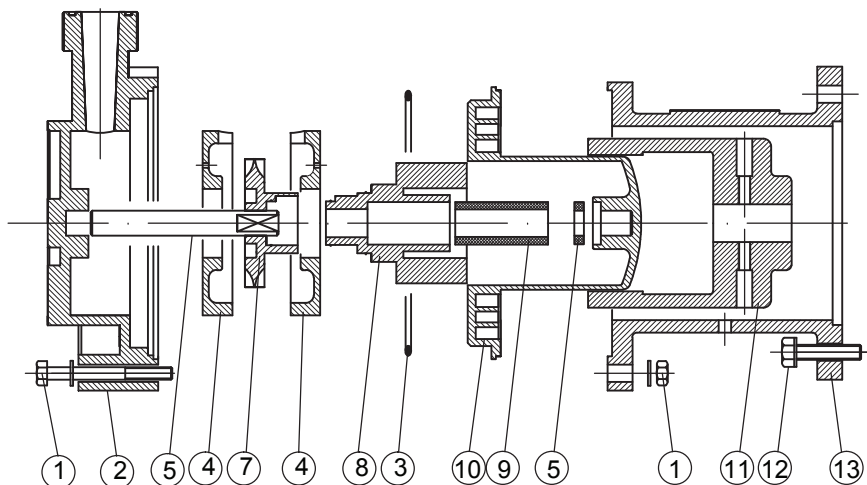


POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	AlSi304	PP-PVDF	EPDM VITON	PP-PVDF	Al203	PVDF	PP-PVDF NdFeb	PTFEC	PP-PVDF	C40 NdFeb	AlSi304	PP

CURVES/CURVE 50HZ-2900 RPM

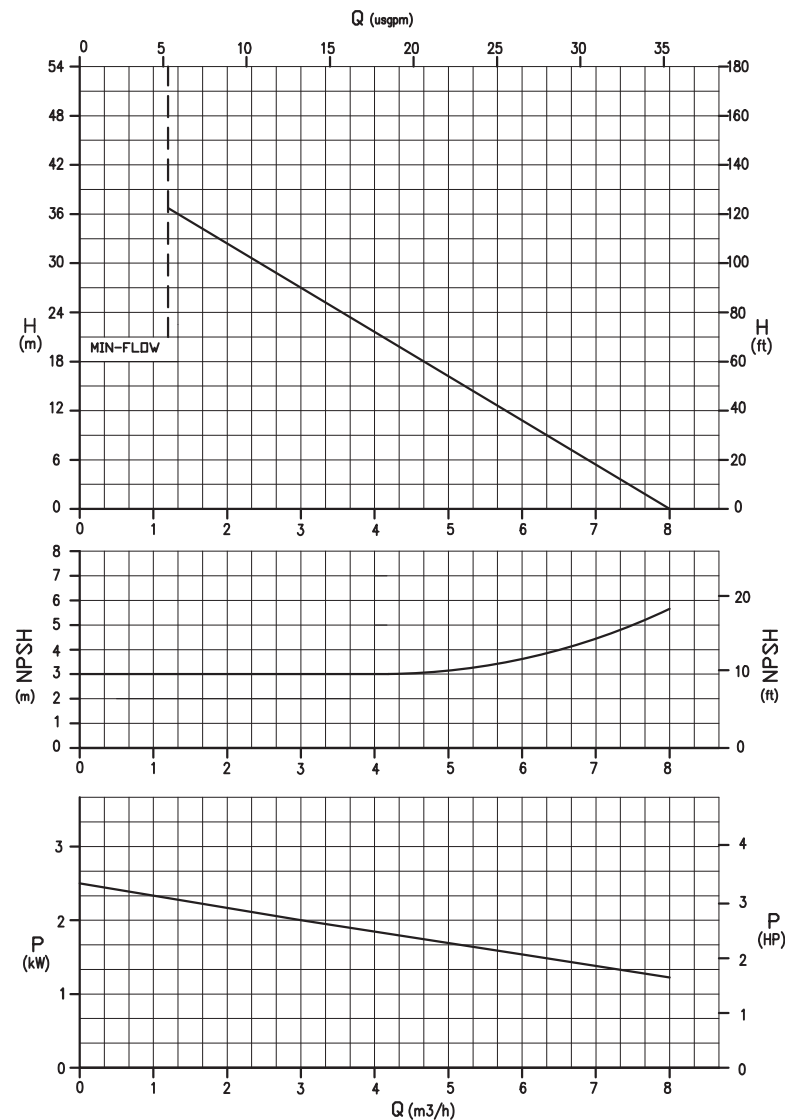

DIMENSIONS/DIMENSIONI D'INGOMBRO

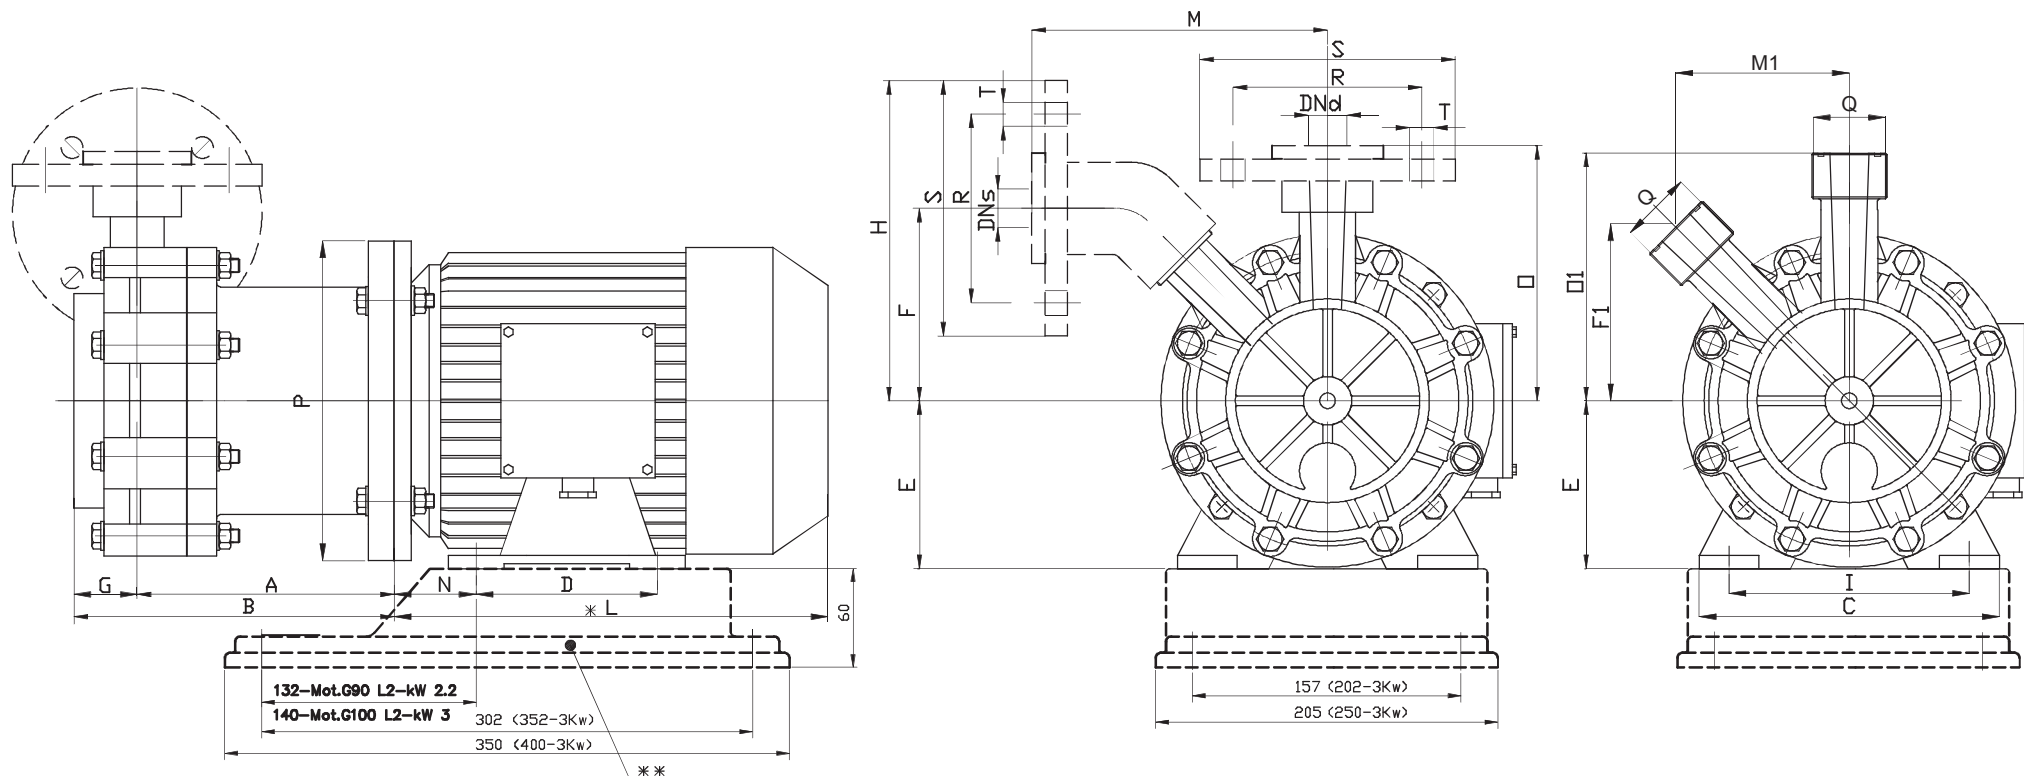


PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -																		FLANGES ANSI/ASME B 16.5 #150 (PN10) DIMENSIONS-mm				
			A	B	C	D	E	F	F1	G	H	I	*L	M	M1	N	O	O1	P	Q	R	S	T	DNs	DNd
HTT 9000	G 90 L2	2.2	187	221	170	125	90	110	95	34	186	140	280	189	95	56	148	135	200	1" 1/2" G MALE	110	153	18	40	40
	G 100 L2	3	207	241	200	140	100					160	316			63			250						

* Different according to the manufacturer / Diverso a seconda del fornitore
** OPTIONAL: Baseplate/Piede d'appoggio - Flanges/Flange

FEATURES/CARATTERISTICHE


Materials available/Materiali disponibili:	PP-PVDF
Max flow/Portata massima:	9 m ³ /h
Max head/Prevalenza massima:	48 m
Max temperature/Temperatura massima:	PP 60°C/PVDF 90°C
Max viscosity/Viscosità massima:	45 cPs
Pressure rating/Pressione nominale massima:	NP/PN 6
Pump weight/Peso pompa:	PP 8 Kg. PVDF 10 Kg.

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

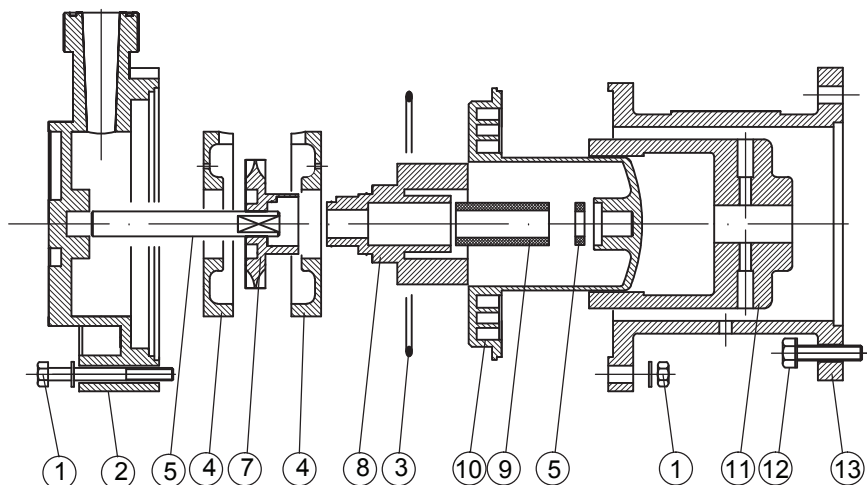


POS.	1	2	3	4	5	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	FRONT AND REAR DISC	SHAFT + RING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MAT.	ALSI304	PP-PVDF	EPDM VITON	PP-PVDF	Al203	PVDF	PP-PVDF NdFeb	PTFEC	PP-PVDF	C40 NdFeb	ALSI304	PP

CURVES/CURVE 50HZ-2900 RPM

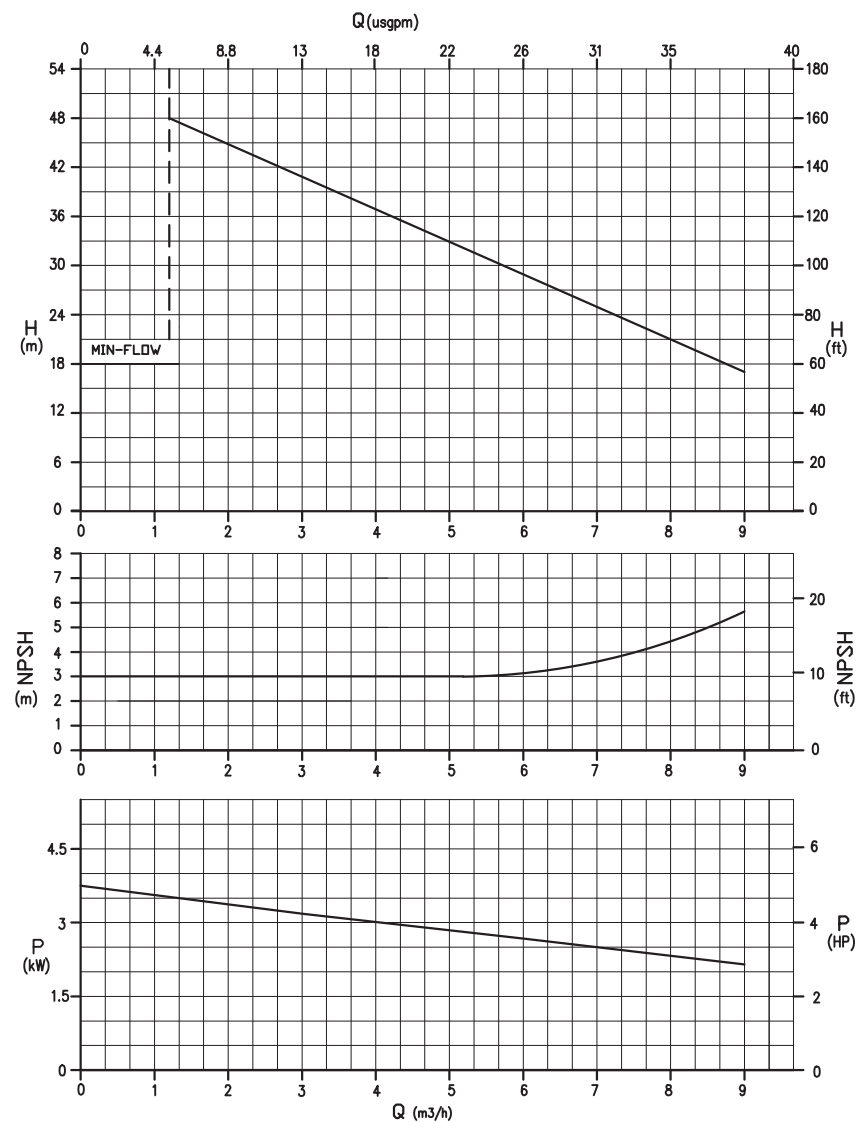

DIMENSIONS/DIMENSIONI D'INGOMBRO

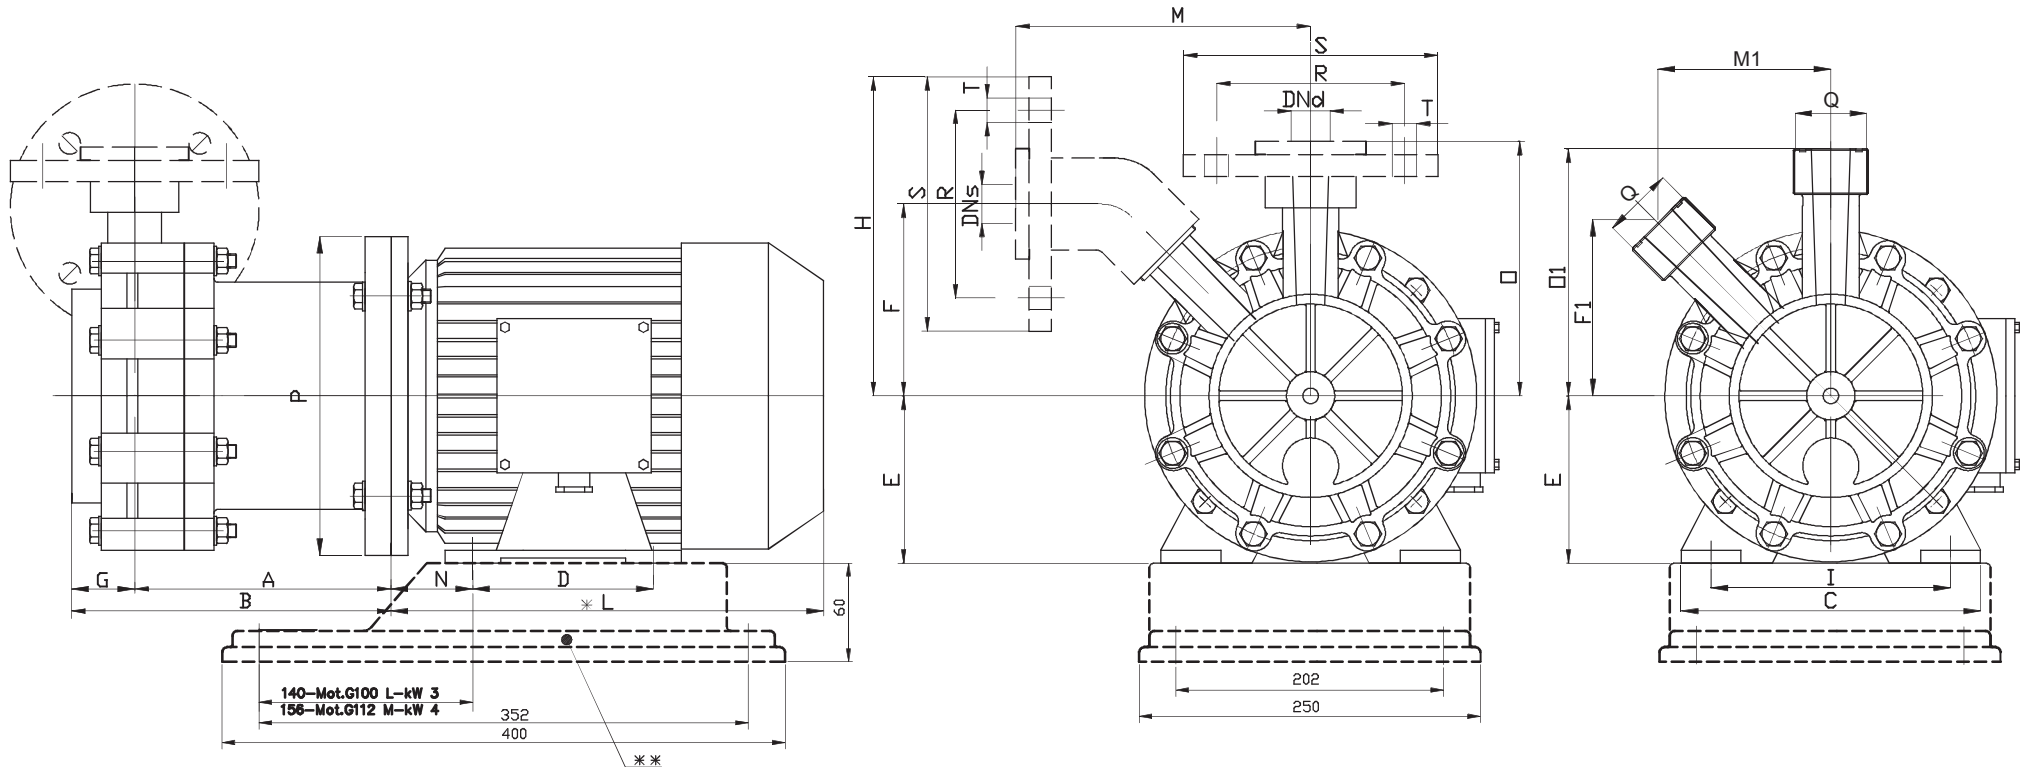

PUMP TYPE	MOTOR FLANGE B3-B5	POT. Kw	DIMENSIONS - mm -																		DIMENSIONS-mm				
			A	B	C	D	E	F	F1	G	H	I	*L	M	M1	N	O	O1	P	Q	R	S	T	DNs	DNd
HTT 12000	G 100 L	3	207	241	200	140	100	110	95	34	186	160	316	189	95	63	148	135	250	1" 1/2" G MALE	110	153	18	40	40
	G 112 M	4			230		112					190	324			70									

* Different according to the manufacturer / Diverso a seconda del fornitore
** OPTIONAL: Baseplate/Piede d'appoggio - Flanges/Flange